



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101444

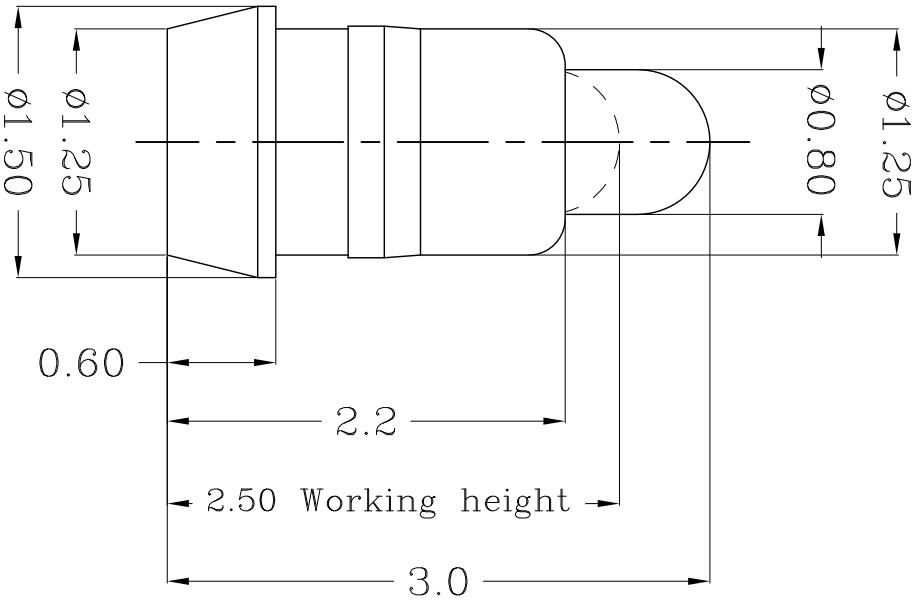

Notes:

- △ Material(材质):
- 1) Body : Brass
 - 2) Plunger : Brass
 - 3) Spring : Stainless steel wire
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 1) Force: 70±20gf per pin at 0.5mm stroke (力: 下压0.5mm 的力: 70±20gf)
- 2) Total stroke(总行程) : 0.70mm
- 3) Durability(寿命): 10,000 cycle min.
- 1) Electrical(电性能)
- 1) Contact resistance(接触抵抗): 30mOhm Max.
- 2) Voltage rating(额定电压): 36V DC Max
- 3) Current rating(额定电流): 2.0A

USED ON
—

101444-1
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ± 0.05		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 3.2/			

MATERIAL		HT TR		FIN				
DWN	APVD	Top-Link Electronics Ltd						
CHK	REL							
NAME								
PGGD PIN								
PG-1.5-0.6-1.25-2.2-3.0								
SCALE								
1:1	A4					DWG	SHEET	
NO.						1 OF 1		
C-101444						REV		
A								
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX								
DO NOT SCALE PRINT								

Top-Link
Electronics Ltd.

DATE	APVD	REVISION RECORD	L TR
2010/06/29		NEW	

LDC	-
DIST	-

4

3

2

1