


DWN No.:
C-101633

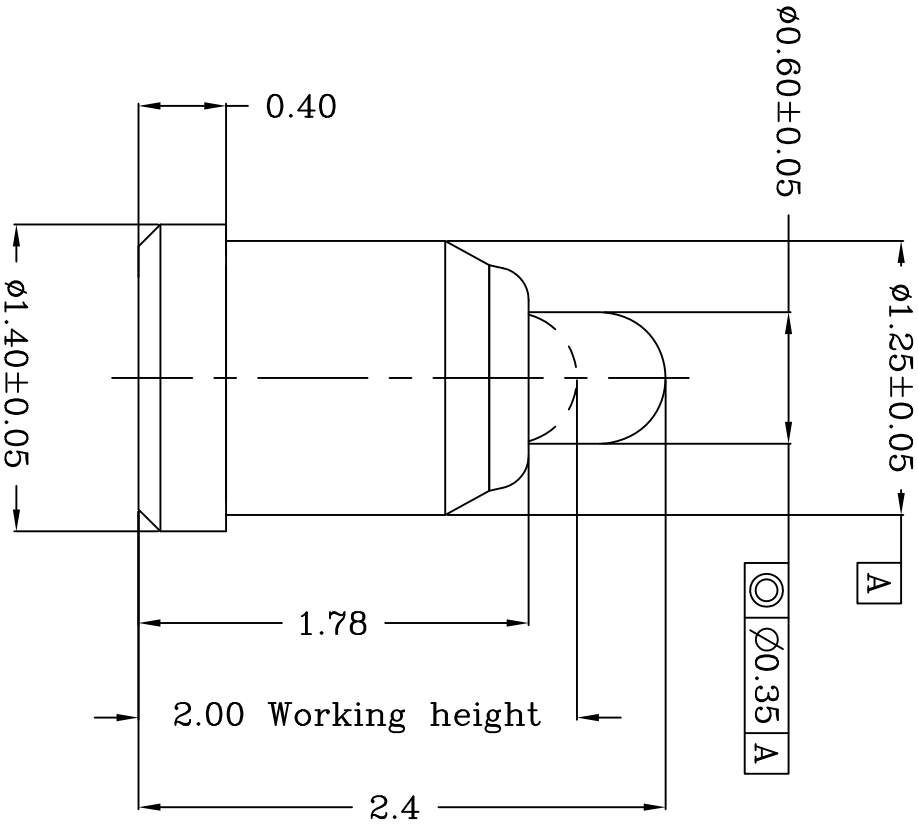

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance			
working height	2.0mm	60±20gf	<3.1>
Durability	10000cycle		

- Not
- 1 Dempnsons shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <3.1> The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
- Resistance: 50mOhm Max
- Current rating: 1.0A
- 4 Reverse complaint.

TOP LINK

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:				
0.0 = ±0.15		CHK:	REL:				
0.00 = ±0.10							
0.000 = ±0.05							
Angle: ±1°							
SURF. TEXTURE:							
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX. DO NOT SCALE PRINT.							
Name		POGO PIN		PG-1.4-0.4-1.25-1.78-2.40			
Scale		Size		DWG No.		Page	
1:1		A4		C-101633		1/1	
						Rev.	
						A	

Top-Link Electronics Ltd.

101633-1
PART NUMBER