



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101150

LDC
-
DIST
-

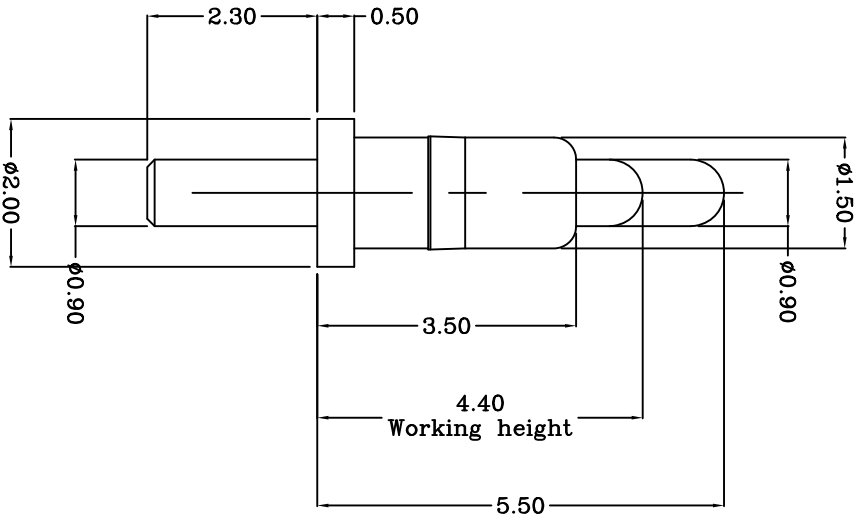

TOP-LINK

Force (gf)

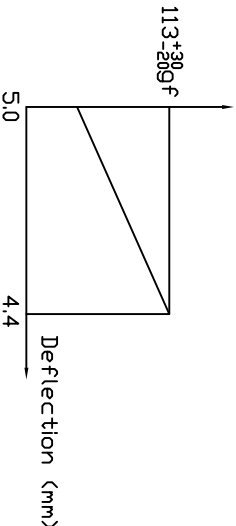

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.25um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.25um Nickle plating

3 Mechanical

1)Total stroke : 1.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101150-1

PART NUMBER

MATL	HT TR	FIN
DWN	APVD	REL
Benny	Lansing	Top-Link Electronics Ltd.
CHK	REL	
Andy		

Top-Link Electronics

Top-Link Electronics Ltd.

NAME

POGO PIN

PG-0.9-2.3-2.0-0.5-1.5-3.5-5.5

SCALE 1:1 A4 DWG NO. C-101150

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

32 SURF TEXTURE: V ANGLE: ±1°

0.000 = ±

0.00 = ±

0.0 = ±

0 = ±

TOLERANCES UNLESS OTHER SPECIFIED

DIMENSIONS IN MM

REVISION RECORD

NEW

DATE

APVD

LTR

4

3

2

1