

DWG NO.
C-101222



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38. PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.25um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 3.0mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC Max
- 3)Current rate: 3A.

NEW		2008/05/19
REVISION		
RECORD	APVD	DATE
L TR		

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
CHK	Lansing		
Jim	REL		
NAME	POGO PIN		
SCALE	1:1	A4	DWG
		NO.	C-101222
			PG-2-5-6.0-4.0-1.0-2.5-5.9-15.4
			Top-Link Electronics Ltd.
			101222-1
			PART NUMBER

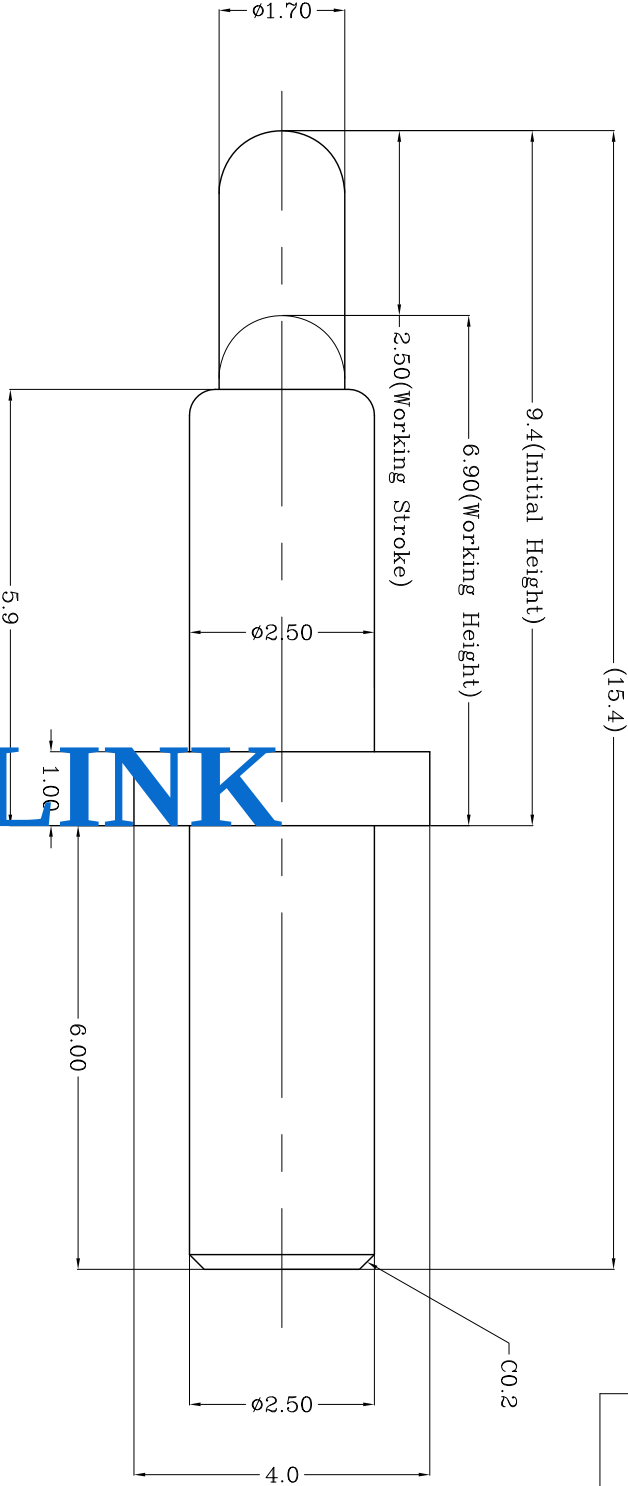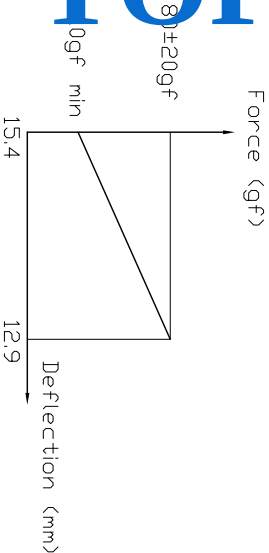

USED DN

-

4

3

2

1