



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101244

LDC
-
DIST
-

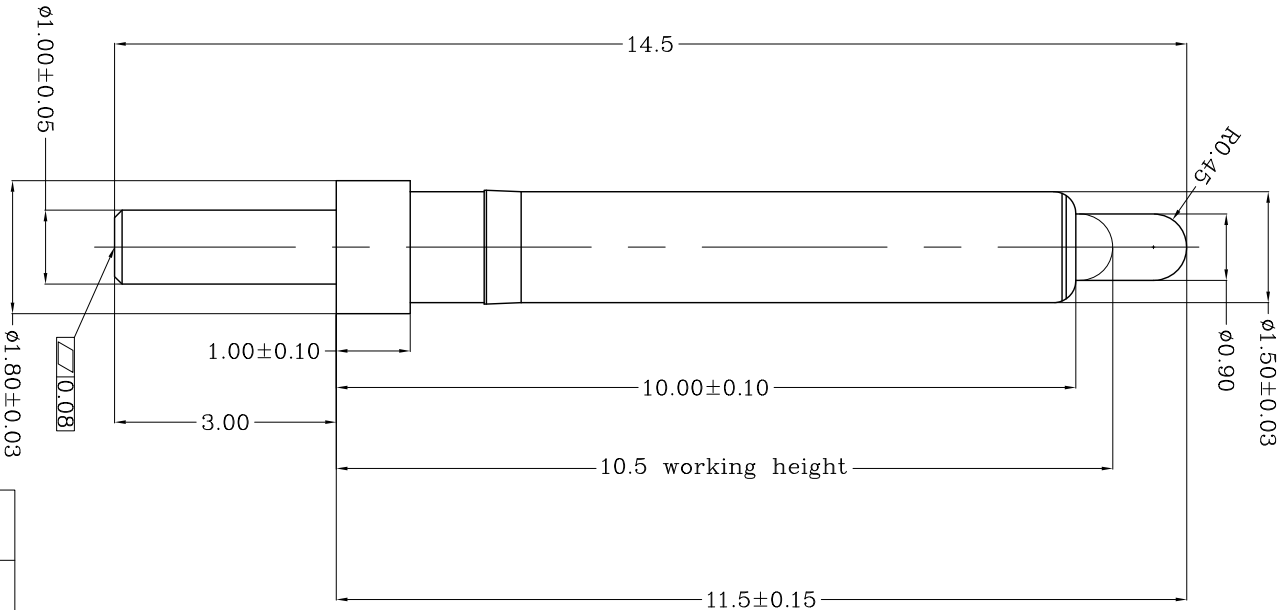

TOP-LINK

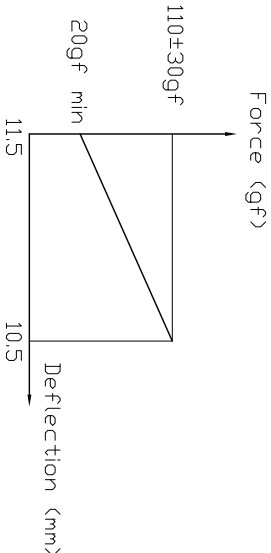

Notes:

Material:

1)Plunger & Body : Brass

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

3)Operating temperature: -40°C to 100°C

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				SURF TEXTURE: 32/			
0	= ± -	REMOVE BURRS, BREAK		1	SCALE	1:1	A4
0.0	= ±0.15	SHARP EDGES R0.05 MAX		2	NAME	PGGD PIN	
0.00	= ± 0.10	DO NOT SCALE PRINT		3	CHK	Jim	REL
0.000	= ±			4	DWG	NO.	C-101244
ANGLE: ±1°				5	FIN	—	✓
				6	HT TR	—	
				7	DWN	qin	APVD
				8	REL	Lansing	Top-Link Electronics Ltd.
				9	FIN	—	✓

PART NUMBER

101244-1

USED ON

-