



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO. 101256

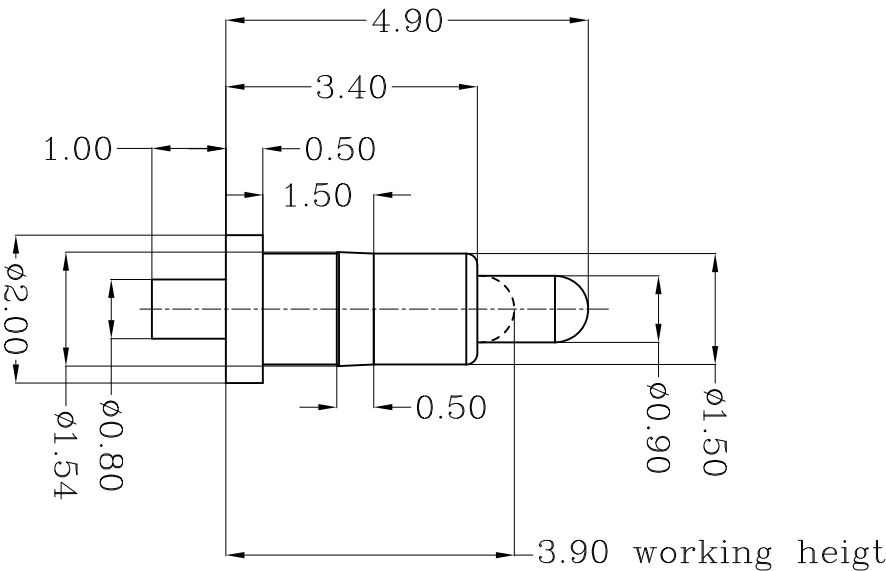

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical


1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

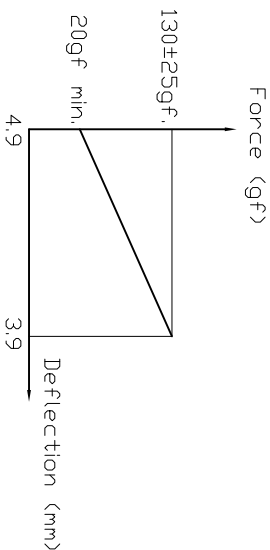

USED ON

-

101256-1

PART NUMBER

MATL	HT TR	FIN
DWN	APVD	—
QIN	Lansing	—
CHK	REL	—
Jim		

Top-Link Electronics Ltd.

NAME PG0D PIN

PG-0.8-1.0-2.0-0.5-1.5-3.4-4.9

SCALE 1:1 A4 ND. C-101256

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

SURF TEXTURE: 3.2/

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

DATE 080813

APVD

REVISION RECORD

LTR

NEW

LOD

DIST

-