



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101276

LDC
-
DIST
-

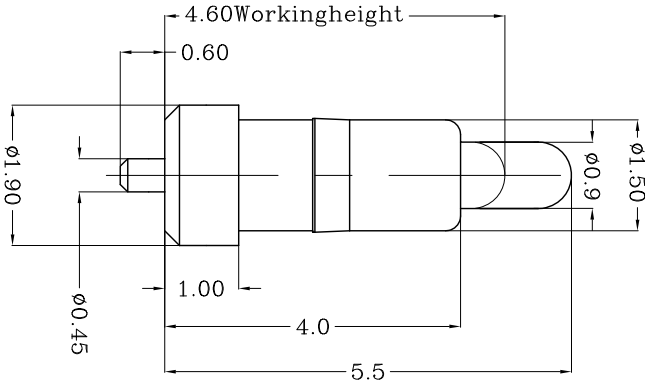

TOP-LINK

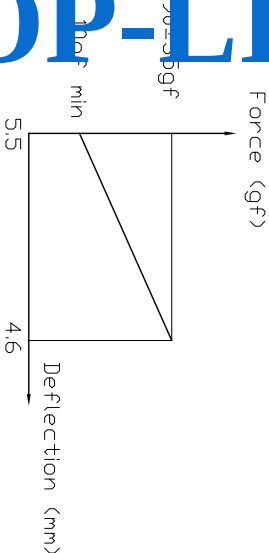

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1)Total stroke : 1.0mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

DIMENSIONS IN MM				MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED				1		—		—	
0 = ± .015				DWN		APVD		Top-Link	
0.0 = ± 0.10				CHK		Lansing		Electronics	
0.000 = ± .				Jim		REL		Top-Link	
ANGLE: ±1°				NAME		POGGO PIN		Electronics Ltd.	
SURF TEXTURE: 32/				SCALE		DWG		SHEET	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				1:1		NO.		1 OF 1	
DO NOT SCALE PRINT				A4		C-101276		REV	
								1	

USED ON

-

101276-1

PART NUMBER

A

B

C

D