




DIST

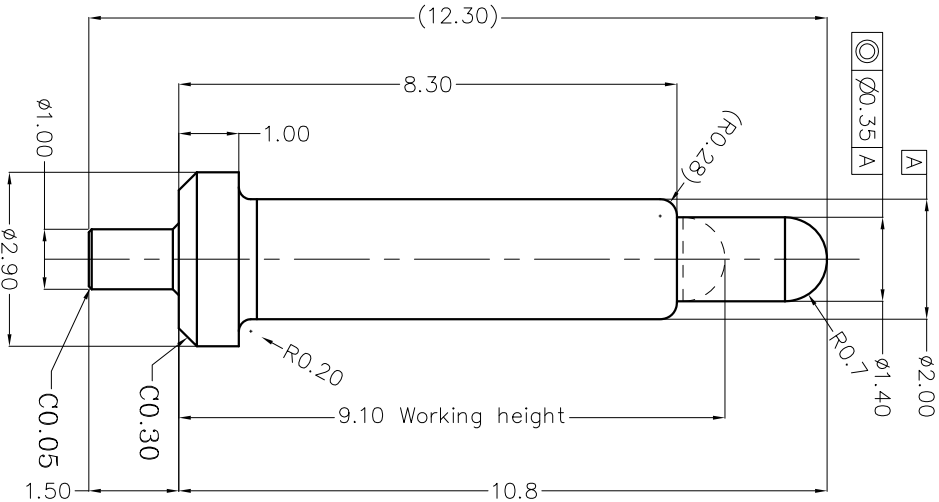

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	9.10mm	160±25gf <2.1>
Durability	10000cycle	

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2> Total stroke : 2.3mm.
- 3 Electrical performance
- Resistance: 30mOhm Max.Current rating: 3.0A
- 4 Remark compliant.

	Renewal	2010/07/28
	NEW	2009/03/02
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight					
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.						
0.0 = ± 0.15		CHK:		REL:							
0.00 = ± 0.10		POGO PIN									
0.000= ± -											
Angle: ±1°											
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.IDO NOT SCALE PRINT.		Name									
		Scale	1:1	Size	A4	DWG No.	C-101338	Page	1/1	Rev.	C