


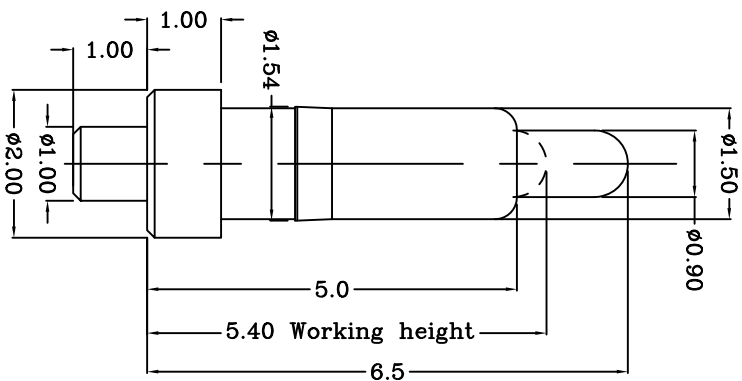

Notes:

① Material(材质):

- 1)Body :Brass
- 2)Plunge :Brass
- 3)Spring :Stainless steel wire

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical (机械性能):

1) Force: $130 \pm 30 \text{ gf}$ per pin at 1.1mm stroke

下压1.1mm的力: $130 \pm 30 \text{ gf}$)

2) Total stroke (总行程) : 1.5mm

3) Durability (寿命): 10,000 cycle min.

4 Electrical (电性能)

1) Contact resistance (接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

101345-1	PART NUMBER
----------	-------------

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ±		DWN		APVD		Top-Link Electronics	
0.0 = ±0.15		QIN		REL		Top-Link Electronics Ltd.	
0.00 = ±0.10		CHK					
0.000 = ±							
ANGLE: ±1°							
SURF TEXTURE: 3.2/√		NAME		PG-10 PIN			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE		DWG NO.		SHEET	
DO NOT SCALE PRINT		1:1		A4		C-101345	
						1 OF 1	
						REV A1	

LDC	-
DIST	-

	NEW		2007/05/04
LTR	REVISION RECORD	APVD	DATE

USED ON