




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

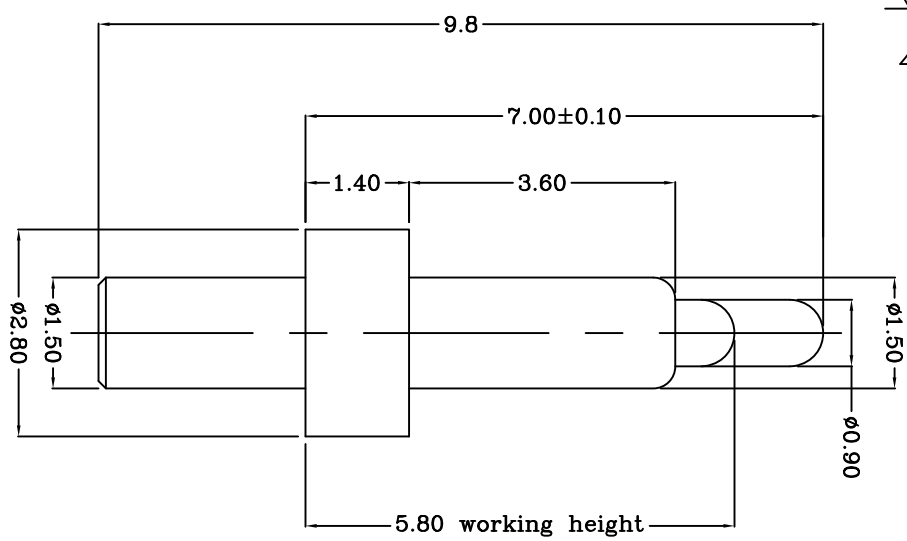


DWG NO.
C-101369



Notes:

Material:

- 1)Plunger & Body : CuZn36 PB3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke: 1.9mm
- 2)Durability: 10000 cycle min.

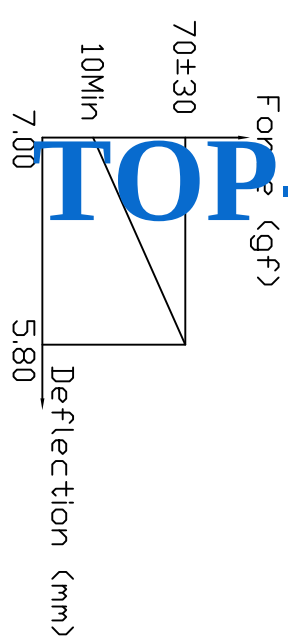

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2009/06/29

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±	0.0	= ±0.15	DWN	QIN	APVD	REL	NAME	PGGD PIN	SCALE	A4	DWG NO.	C-101369	SHEET 1 OF 1	REV 1
0.00	= ±	0.00	= ±0.10	CHK											
0.000	= ±	0.000	= ±												
ANGLE: ±1°				SURF TEXTURE: 3.2/				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			

101369-1
PART NUMBER

Top-Link
Electronics Ltd.

USED ON