


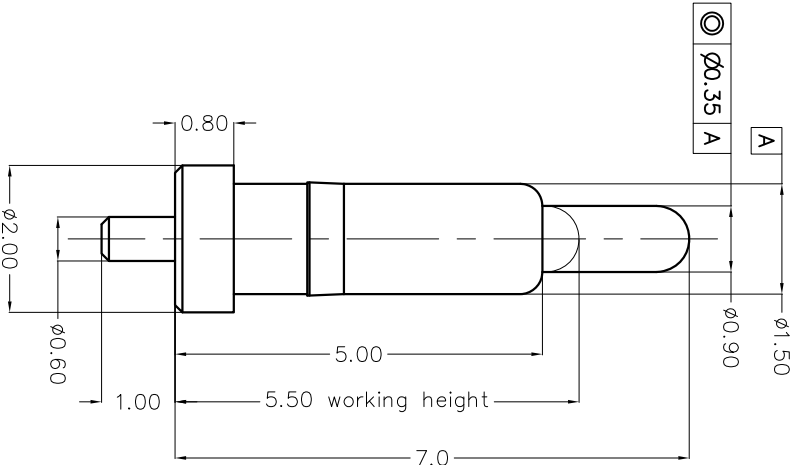

TOP LINK

Not
1 Demnnsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> Stroke force is the average of forces obtained when plunger goes downwards and upwards.
<2.2> Total stroke : 1.9mm.
3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
4 Remark compliant.

Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

DIST

Rev.	Renewal	2010/07/28
	NEW	2008/10/22
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
0.0 = ± 0.15		CHK:		REL:			
0.00 = ± 0.10							
0.000 = ± 0.000							
Angle: ±1°		Name POGO PIN					
SURF. TEXTURE:							
REMOVE BURRS							
BREAK SHARP EDGES							
R0.05 MAX.DO NOT SCALE PRINT.		Scale	Size	DWG No.	C-101379	Page	Rev.
		1:1	A4			1/1	C

Top-Link Electronics
Electronics Ltd.