



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101445

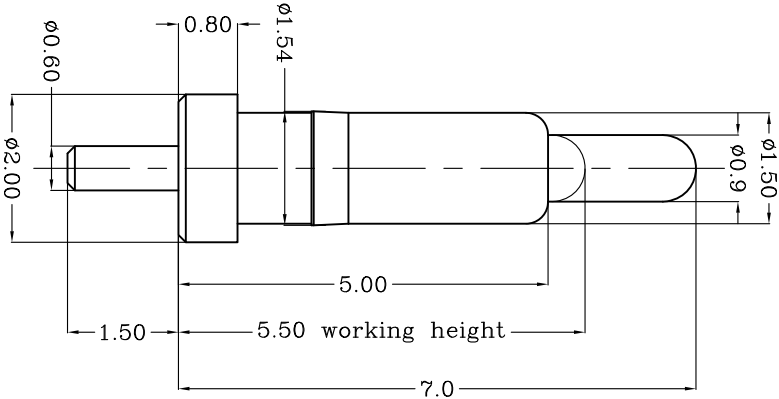

Notes:
△ Material (材质):

1) Body: Brass

2) Plunger: Brass

3) Spring: Stainless steel wire

2 Plating (电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um Min)

3 Mechanical (机械性能):

1) Force: 80±35gf per pin at 1.5mm stroke

(力: 下压1.5mm的力: 80±35gf)

2) Total stroke (总行程): 1.90mm

3) Duration (寿命): 10,000 cycle min.

4 Electrical (电性能):

1) Contact resistance (接触阻抗): 30mOhm Max.

2) Voltage rating (额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

TOP LINK

USED ON

-

101445-1
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ± -		

ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

更新			2010/12/22
NEW			2010/06/30
REVISION RECORD	APVD	DATE	
LTR			

LDC	-
DIST	-

4

3

2

1