


DWG NO.
C-101449

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

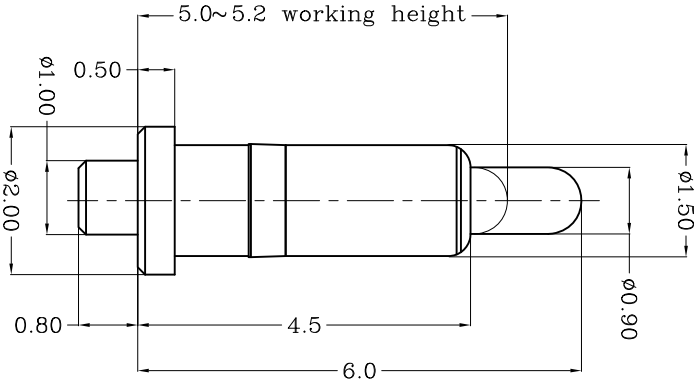

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plating : Brass
- 3) Solder : Stainless steel wire
- 2 Plating(电镀):
 - 1) Body Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1) Force: 135±25gf per pin at 1.0mm stroke (弹力: 1.0mm 的力: 135±25gf)
 - 2) Total stroke(总行程) : 1.20mm
 - 3) Durability(寿命): 10,000 cycle min.
 - 4 Electrical(电性能)
 - 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

TOP LINK

LDC
-
DIST
-

NEW			2010/07/23
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	—
DWN	△	APVD	
CHK		REL	
NAME PGD PIN			
PG-10-0.8-2.0-0.5-1.5-4.5-6.0			
SCALE	1:1	DWG NO.	C-101449
Top-Link Electronics Ltd.			

101449-1
PART NUMBER

USED ON

-