



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101498

proposal

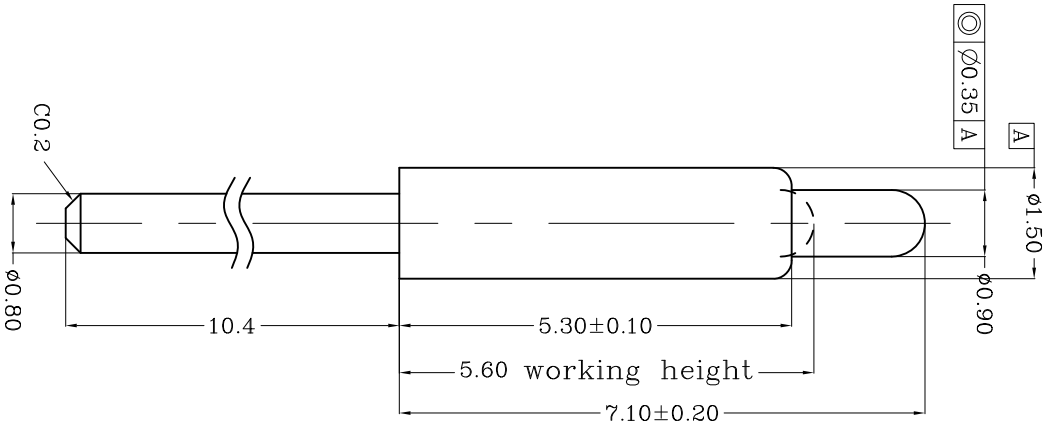

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<3> The force is the average of forces obtained when plunger goes downwards and upwards.

3 Electrical performance

Resistance: 50mOhm Max.Current rating: 2.0A

4 Packaging Spec.Comformance to EIA 481

5 Reuse complaint.

Table 1 Mechanical performance		
working height	5.60mm	40±10gf <3.1>
Durability	20000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	0.1um Au over 1.4um Ni
2	Plunger	1	Leaded Brass	0.4um Au over 1.4um Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	NEW	2011/06/13
Revision record.		
Date.		

Top-Link Electronics Ltd.		Type	Unit	Weight	
Customer drawing		mm			
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:	Top-Link Electronics Top-Link Electronics Ltd.	
Qim		REL:			
CHK:					
0.0 = ±0.15					
0.00 = ±0.10					
0.000 = ±0.05					
Angle: ±1°					
SURF. TEXTURE:					
REMOVE BURRS.					
BREAK SHARP EDGES					
R0.05 MAX. DO NOT SCALE PRINT.					
Name		POGO PIN PG-0.8-10.4-1.5-5.3-7.1			
Scale	Size	DWG No.			
1:1	A4	C-101498	Page	1/1	Rev. A

4

3

2

1