



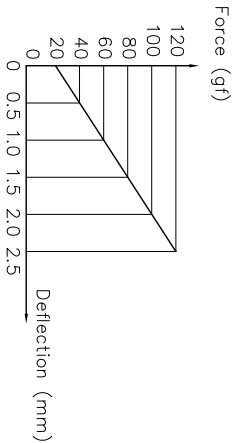

proposal

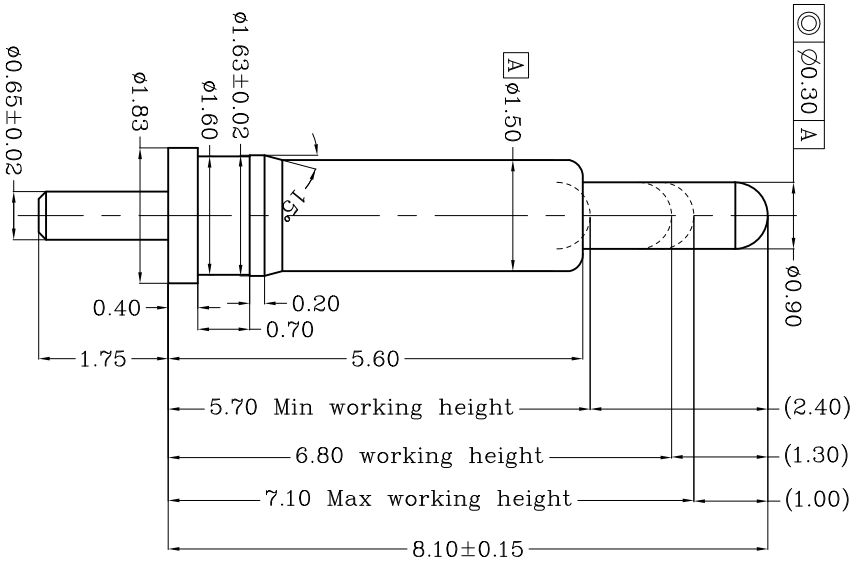

Spring rate(C=40gf/mm)

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Max working height	7.10mm	60±18gf <2.1>
working height	6.80mm	72±21gf <2.1>
Min working height	5.70mm	116±35fg
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A Max
 - 4 RoHS compliant.

TOP-LINK

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin zuozhong	APVD:		
0.0 = ±0.15	CHK:		REL:		
0.00 = ±0.10					
0.000 = ±0.05	Angle: ±1°				
REMOVE BURRS.	SURF. TEXTURE:				
BREAK SHARP EDGES	REMOVE SHARP EDGES				
SCALE PRINT.	POGO PIN				
	Scale	Size	DWG No.		
	1:1	A4	C-101618		

101618-1
PART NUMBER

NEW	2012/05/08
Revision record.	Date.
Rev.	

DIST
DIST
DIST