


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.

C-101620

LDC	-
DIST	-

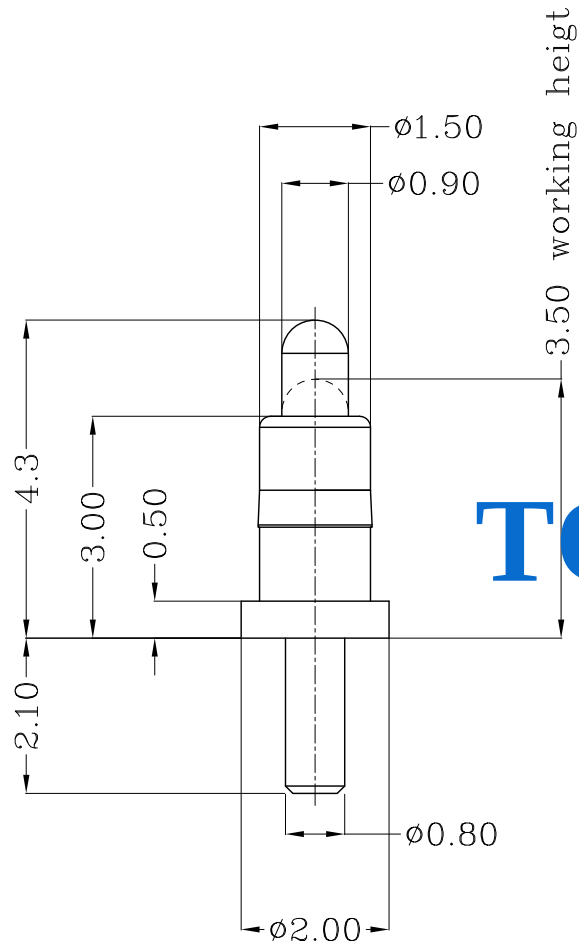

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical


1)Total stroke : 1.2mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

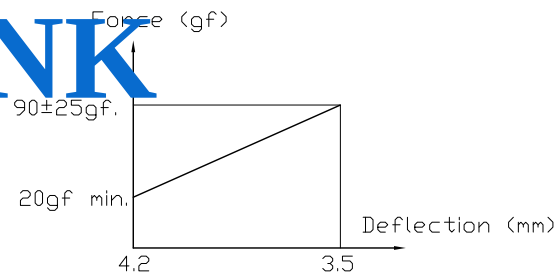

USED ON

-

	NEW		120508
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	-	FIN	-
DWN	Qin	APVD		top-Link Electronics	Top-Link Electronics Ltd.
CHK		REL			
NAME	POGO PIN				
SCALE	1:1	A4	DWG NO. C-101620	SHEET 1 OF 1	REV 1

101620-1

PART NUMBER