


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101673

proposal

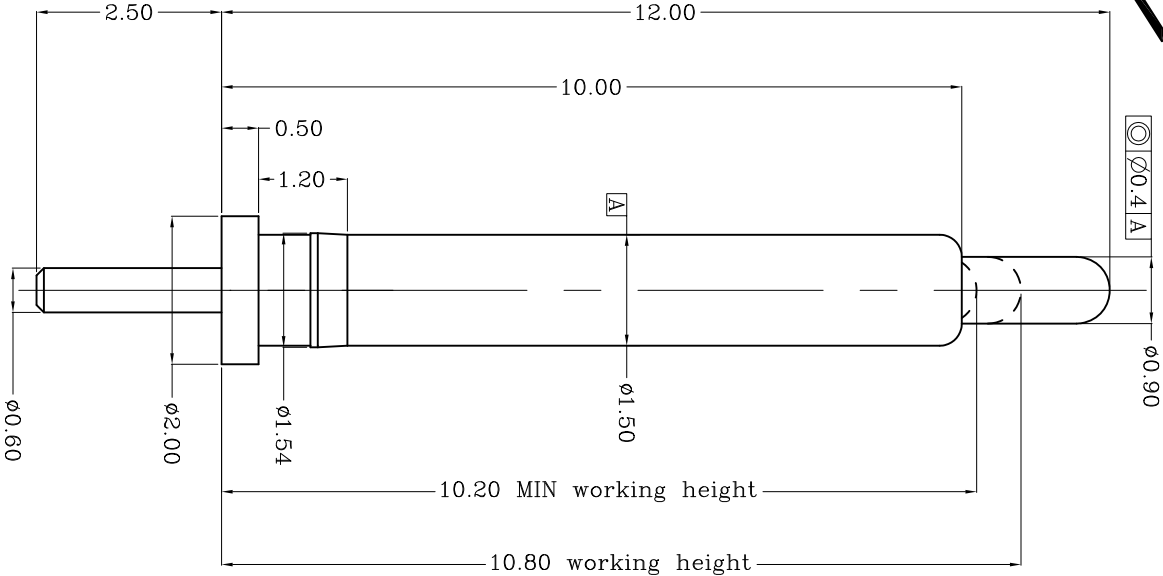


Table 1 Mechanical performance		
working height	10.80mm	120±25gf <2.1>
Durability	10,000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP LINK

- Not
- 1 Demnisions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than 10.20 MIN working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 3.0A
 - 4 RoHS compliant.

Rev.	NEW	2012/10/23
Revision record.		
Date.		

Top-Link Electronics Ltd.	Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm	
0.0 = ±0.15	DWN: JERRY	APVD:	
0.00 = ±0.10	CHK:	REL:	
0.000 = ±0.05	Angle: ±4°		
SURF. TEXTURE: REMOVE BURRS.	Name	POGO PIN	
BREAK SHARP EDGES R0.05 MAX, DO NOT SCALE PRINT.	Scale	Size	DWG No.
	1:1	A4	C-101673

Top-Link Electronics Ltd.

101673-1
PART NUMBER

4

3

2

1