


proposal

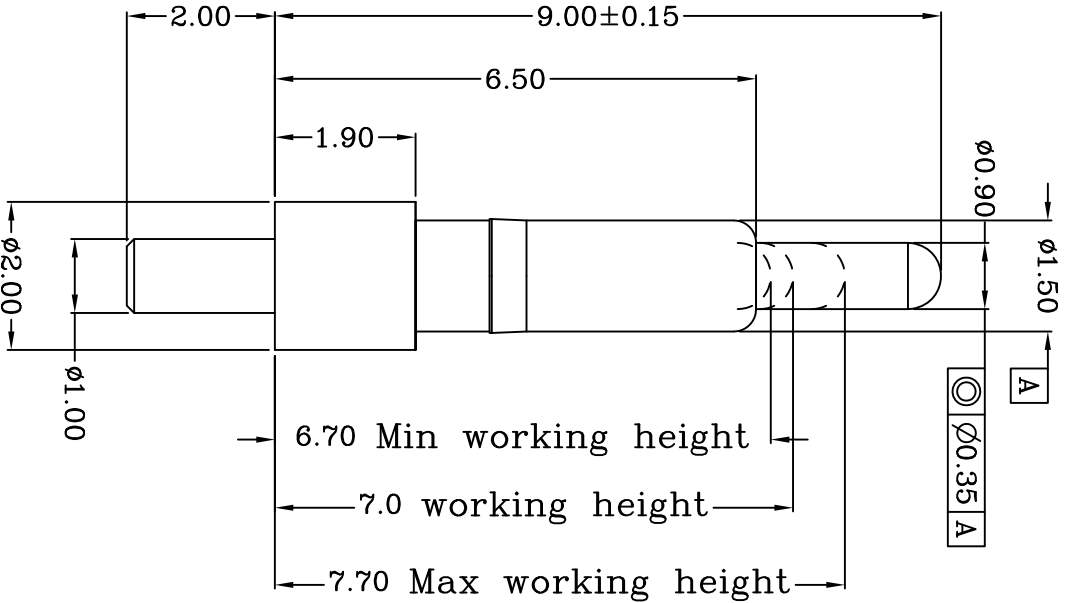

DIST

Rev.	NEW	2013/04/11	Date.
Revision record.			

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wonlu	APVD:		
0.0 = ± 0.15	CHK:		REL:		
0.00 = ± 0.10	Angle: ± 1°				
0.000 = ± 0.005	SURF. TEXTURE:				
REMOVE BURRS.	BREAK SHARP EDGES				
SCALE PRINT.	POGO PIN				
	Scale	Size	DWG No.	C-101718	Page 1/1
	1:1	A4			Rev. 1

101718-1	PART NUMBER
----------	-------------

Table 1 Mechanical performance		
working height	7.00mm	85gf min
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				

Not
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2> Warning: Working height are not permitted to be less than 7.0 working height.
3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
4 RoHS compliant.

TOP LINK