


proposal

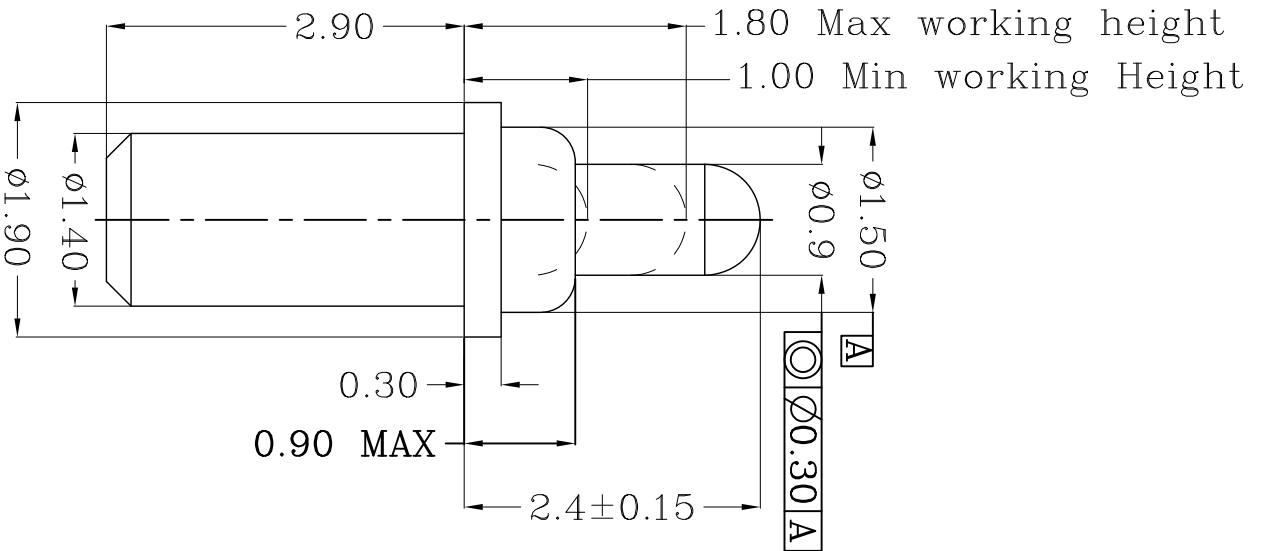

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 Electrical performance
- 5 Resistance:50mOhm Max.
- 6 Current rating: 2.0A
- 7 RoHS compliant.

Table 1 Mechanical performance

working height	1.20mm	80gf min<2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0	±0.15	DWN:	JERRY	APVD:
0.0	±0.10	CHK:	REL:	
0.000	±0.001	Name		
SURF. TEXTURE:		POGO PIN		
REMOVE BURRS:				
BREAK SHARP EDGES				
R0.05 MAX DO NOT				
SCALE PRINT:		Scale	Size	DWG No.
		1:1	A4	C-101763

PART NUMBER
101763-1

Top-Link Electronics Ltd.

Top-Link Electronics Ltd.

Rev.	Revision record.	Date.
	Min working height:1.0mm	2013/07/11
	working height:1.2mm	
	NEW	2013/07/03

DIST

