


proposal

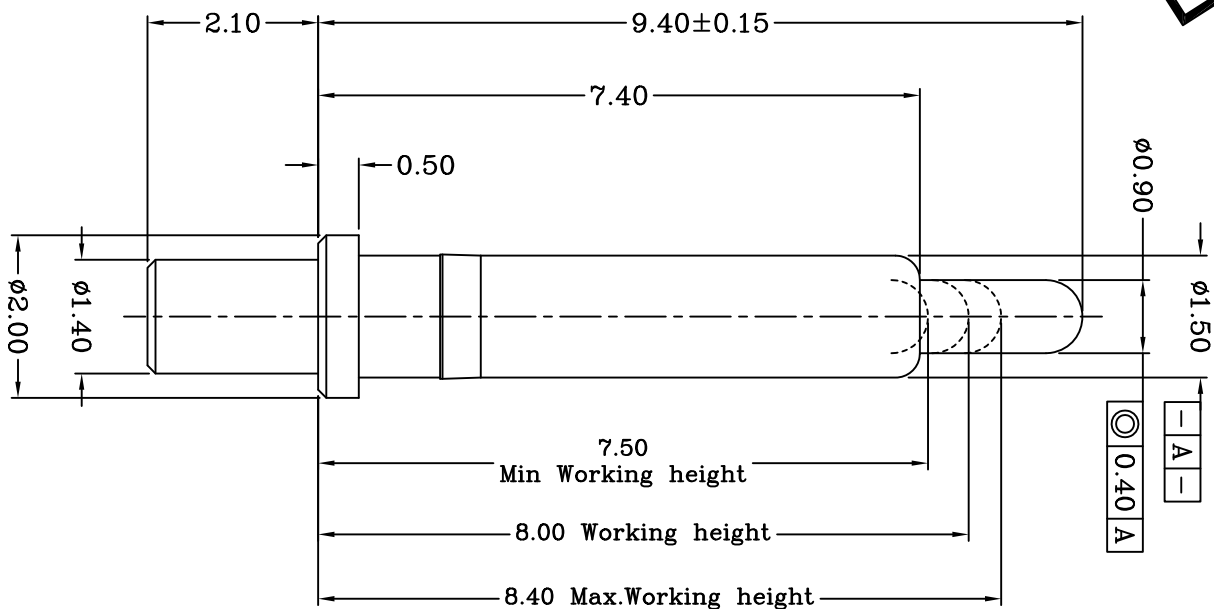

Notes:

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working height are not permitted to be less than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 RoHS compliant.

TOP-LINK

Table 1 Mechanical performance

working height	8.00mm	135±35gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	——
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	—
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:				
0.0 = ±	0.15	Cai wanlu					
0.00 = ±	0.10	CHK:	REL:				
0.000 = ±	—						
Angle: #1							
SURF. TEXTURE:							
REMOVE BURRS							
BREAK SHARP EDGES							
R0.05 MAX. DO NOT							
SCALE PRINT.							
		Name	POGO PIN				
Scale	Size	DWG No.			Page	Rev.	
1:1	A4	C-20101011215			1/1	1	