


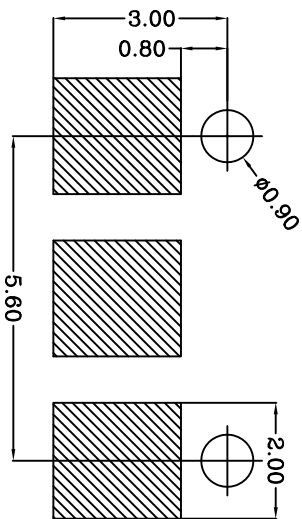


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

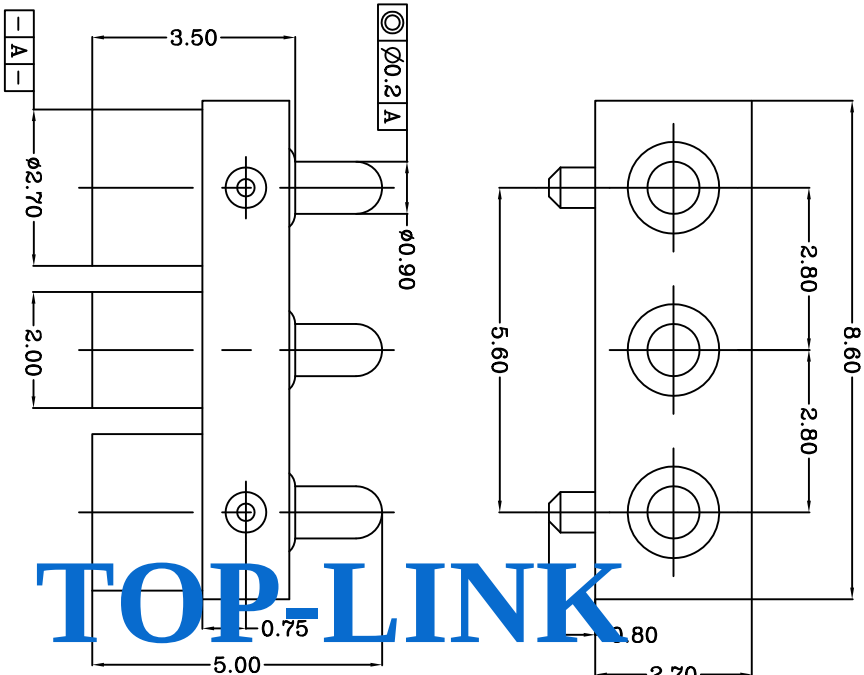

DWG NO.
C-100002

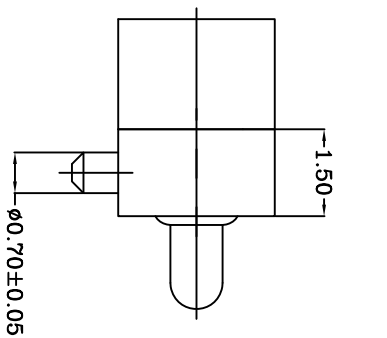

Recommended P.C.B.
layout (Component Side)

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black, (UL94V-0)
 - 2 Mechanical demands:
Full stroke: 1.4mm
Plating plunger: Min 0.4um Au over 1.4um Ni
Plating body: Min 0.1um Au over 1.4um .

LDC
-
DIST
-

增加同轴度	8003/06/18
NEW	8007/04/03
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±

SURF TEXTURE: $\frac{3.2}{\sqrt{ }}$
ANGLE: ±1°
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT	TR	FIN
DWN			
Benny	APVD	Lansing	
CHK	REL		
Andy			
NAME	BATTERY CONNECTOR	3 POS. RIGHT ANGLE	
SCALE	1:1	A4	DWG NO.
			C-100002
			SHEET 1 OF 1
			REV B

100002-3
PART NUMBER

USED ON

-