
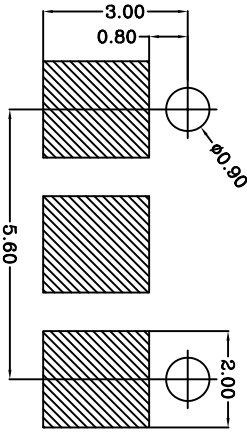
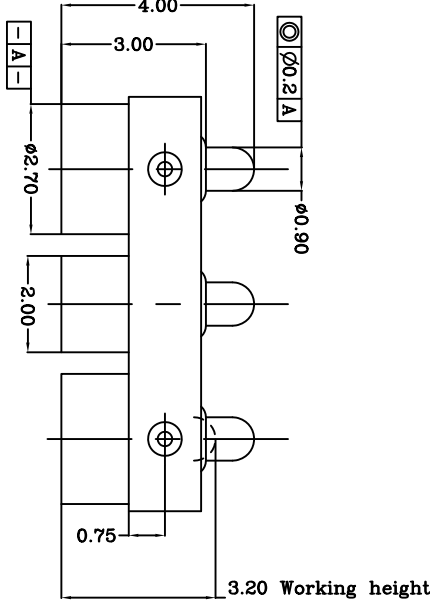


DWN No.:
C-100905

proposal

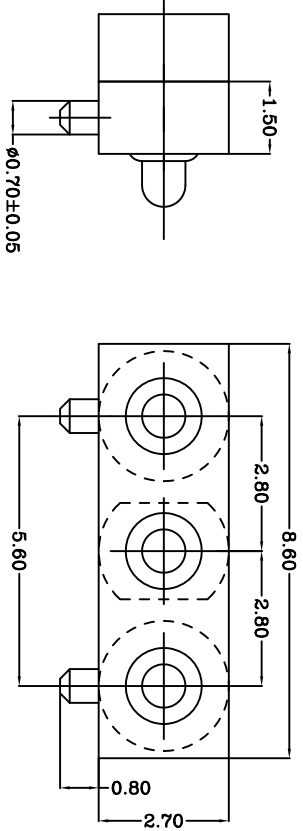

Recommended P.C.B.
layout (Component Side)

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Conformance to EIA 481
 - 5 RoHS compliant.

Table 1 Mechanical performance		
Max.working height	3.20mm	120±25gf
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wanlu	APVD:			100905-3
0.0 = ±0.15	CHK:	REL:				
0.00 = ±0.10						
0.000 = ±0.05						
Angle: ±1°	Name	Customer drawing				
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
RO.05 MAX.DO NOT	Scale	Size	DWG No.		Page	Rev.
SCALE PRINT.	1:1	A4	C-100905		1/1	A

DIST

Rev.	Revision record.	Date.
	NEW	2012/08/21