





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

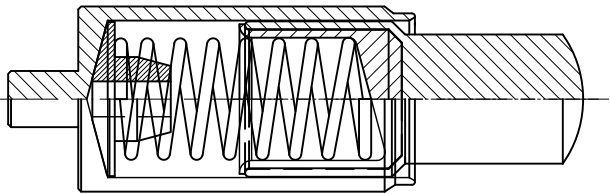

DWG NO. C-101463

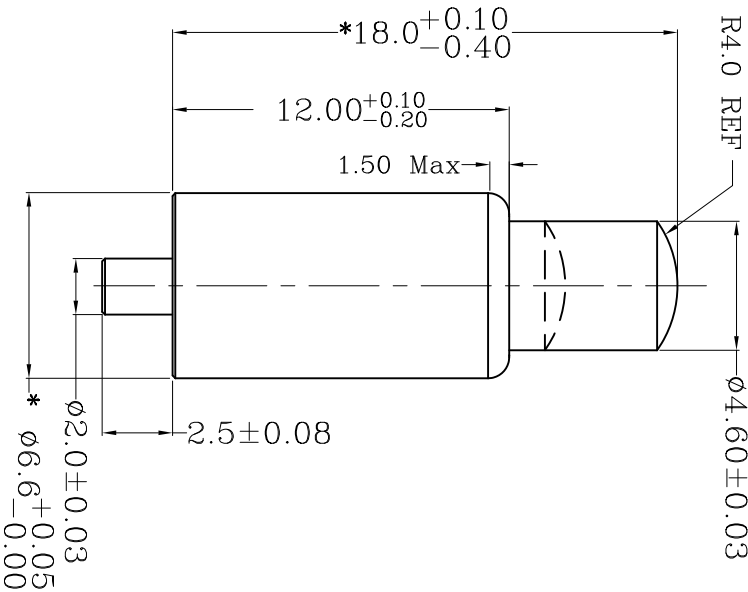

TOP-LINK

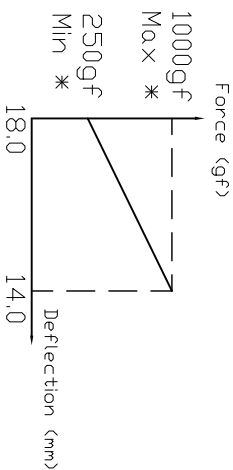

- Notes:
- Material: 1)Plunger & Body : Brass C3604 2)Spring : Stainless steel wire 3)Wedge and spring holder: LCP (L304G35) 4)Plating
 - 1)Body Min 0.125um Au over 1.4um Nickel plating 2)Plunger Min 0.4um Au over 1.4um Nickel plating
 - Mechanical 1)Total stroke : 4.0+0.5mm 2)Durability: 10,000 cycle min.
 - Electrical 1)Contact resistance: 20 mΩ max 2)Rate voltage & Current: 12V DC 5A

USED ON

LDC

-

DIST

-

4

3

2

1

NEW		2010/11/03
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—	✓
DWN	APVD	REL	PGD PIN	PG-2.0-2.5-6.6-12.0-4.60-18.0	Top-Link Electronics Ltd.	Top-Link Electronics Ltd.
CHK	REL	REL	REL	REL	REL	REL
NAME	SCALE	A4	DWG NO.	C-101463	SHEET	REV
1:1	1:1	A4	C-101463	1 OF 1	1	A

PART NUMBER

101463-1