


DWG NO. C-101485

TOP-LINK

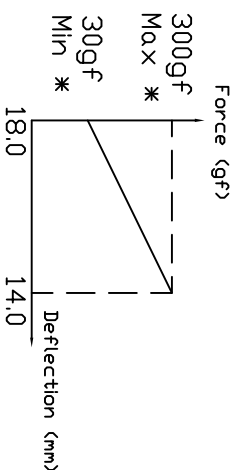

- Notes:
- 1)Plunger & Body :Brass C3604
 - 2)Spring : Stainless steel wire
 - 3)Wedge and spring holder: LCP (L304035)
- Plating
- 1)Body Min 0.125um Au over 1.4um Nickel plating
 - 2)Plunger Min 0.125um Pd over 1.4um Nickel plating
- Mechanical
- 1)Total stroke : 4.0^{+0.3}_{-0.2}mm
 - 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance: 20 mΩ max
 - 2)Rate voltage & Current: 12V DC 5A
- 5 Parts must be completely assembled and slide smoothly
 - 6 No rust or grease to be seen on finish part.
 - 7 No bending and any other hurt allowed on all parts after riveting.
 - 8 Part must be RoHS compliant and halogen free.
 - 9 The symbol * denotes that dimensions are critical and needs to be included on process inspection.
- 10 Customer- P/N: VP-00006165--005

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR		FIN		
0	= ±-	DWN	APVD		Top-Link Electronics Top-Link Electronics Ltd.		
0.0	= ±0.15	qin					
0.00	= ±0.10	REL					
0.000	= ±-						
ANGLE: ±1°							
SURF TEXTURE: 32/		NAME					
REMOVE BURS, BREAK SHARP EDGES, R0.05 MAX		PGGD PIN					
DD NOT SCALE PRINT		SCALE	A4	DWG NO.	C-101485	SHEET 1 OF 1	REV 3

101485-1		PART NUMBER	
MPL		HT TR	FIN
		— ✓	
DVN	APVD	Top-Link Electronics Ltd.	
GIN	REL		
CHK			
NAME			
PGGD PIN			
PG-2.0-2.5-6.6-12.0-4.60-18.0			
SCALE	A4	DWG NO.	SHEET
1:1		C-101485	1 OF 1
		REV	3

USED ON