


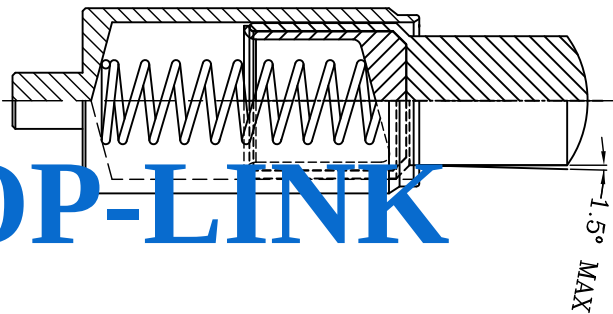


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO. C-101605

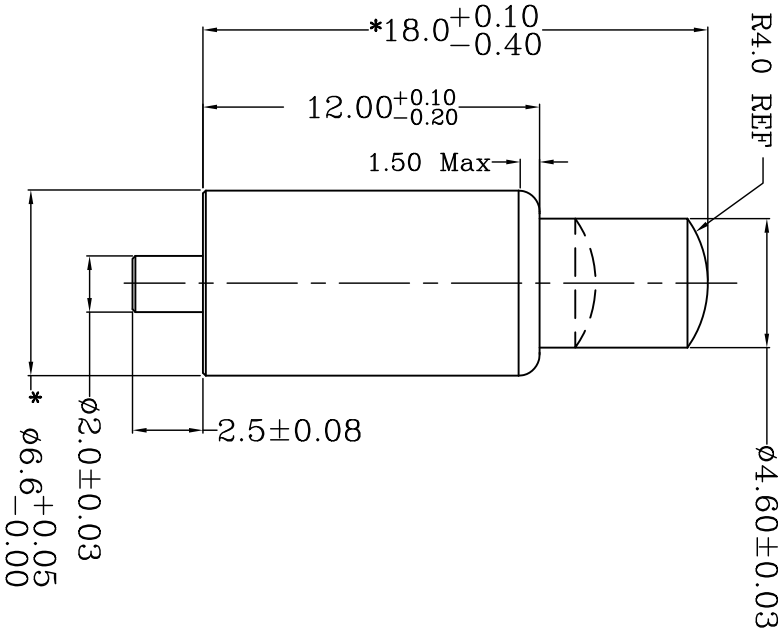


TOP-LINK

Notes:
Material:
1)Plunger & Body :Brass C3604
2)Spring : Stainless steel wire
3)Wedge and spring holder: LCP

2 Plating
1)Body Min 0.125um Au over 1.4um Nickel plating
2)Plunger Min 0.2um Au over 1.4um Nickel plating

3 Mechanical
1)Total stroke : 4.0±0.5mm
2)Durability: 10,000 cycle min.

4 Electrical
1)Contact resistance:30 mΩ max
2)Rate voltage & Current: 12V DC 3A

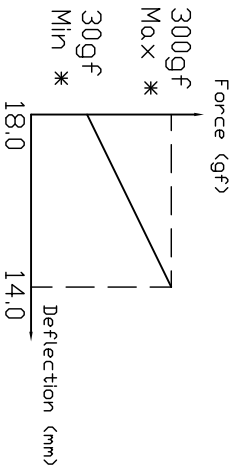

LDC	-
DIST	-

更新	2012/07/04	APVD	DATE
NEW	2010/12/06	REVISION	RECORD
LTR			

DIMENSIONS IN MM	TOLERANCES UNLESS	OTHER SPECIFIED
0	= ±	-
0.0	= ±0.15	
0.00	= ±0.10	
0.000	= ±	-
ANGLE: ±1°		
SURF TEXTURE: 32/		
REMOVE BURRS, BREAK		
SHARP EDGES R0.05 MAX		
DO NOT SCALE PRINT		

MATL	HT TR	FIN	NAME
1	-	-	POGO PIN
DWN	APVD	REL	PG-2.0-2.5-6.6-12.0-4.60-18.0
CHK			Top-Link Electronics Ltd.
SCALE	A4	DWG NO.	C-101605
1:1			
		SHEET	REV
		1 OF 1	3

101605-1
PART NUMBER

USED DN -