


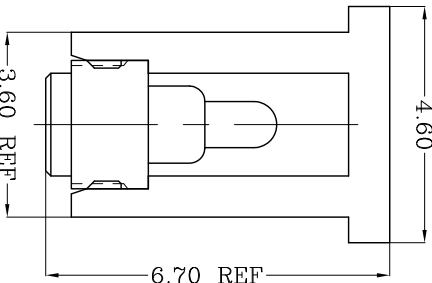
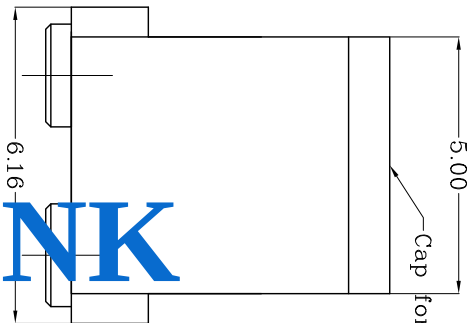
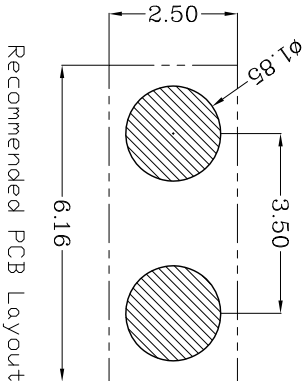


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

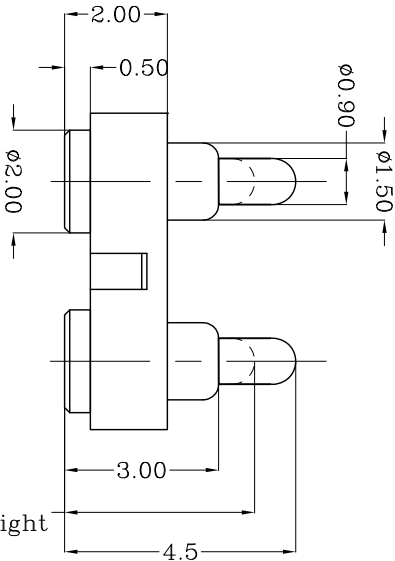

DWG NO.
C-100543-2

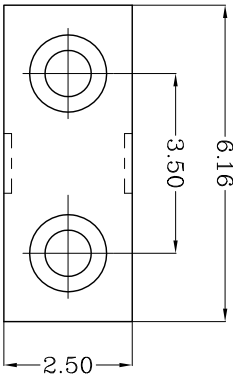

Notes:

1) Material (材料):
Housing: PBT UL94 V-0 Color Black.
Contact: Brass
Spring: Stainless steel wire

2) Plating:
1) Body: min. 1.4um Gold plating over min. 1.4um Nickel plating (Body: 鍍金 1.4um Min 鍍底 1.4um Min)
2) Plunger: Min. 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 鍍金 0.4um Min 鍍底 1.4um Min)

3) Mechanical:
Total tested (總行程): 1.40mm
Durability (壽命): 10,000 cycle min.

4) Electrical (電性能):
Contact resistance (接觸抵抗): 30mOhm Max.
Voltage rating (額定電壓): 36V DC Max
Current rating (額定電流): 2.0A

LDC
-
DIST
-

LTR
REVISION
RECORD
NEW
APVD
DATE
2009/06/26

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL
DWN
CHK
NAME
SCALE
1:1
A4
DWG
NO.
C-100543-2
HT TR
FIN
PART NUMBER
100543-2
Top-Link
Electronics Ltd.

4

3

2

1

USED ON
-