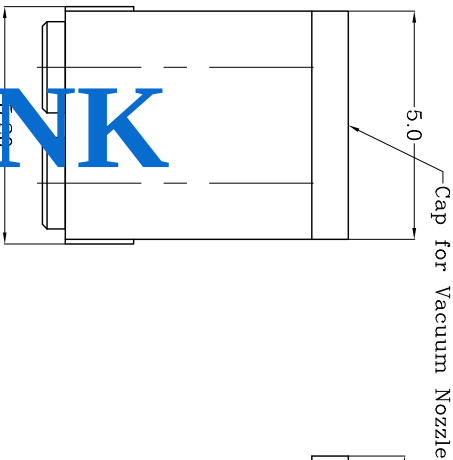
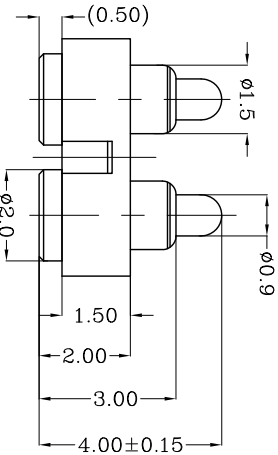




Recommended PCB Layout

Table 1 Mechanical performance			
Max working height	3.50mm	110±25gf <2.1>	
Min working height	3.20mm	140±35	
Durability	10000cycle		

B

- Notes:
- 1)Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 0.90mm
Durability(寿命): 10,000 cycle min.

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2010/02/23

DIMENSIONS IN MM	
TOLERANCES UNLESS	
OTHER SPECIFIED	
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	HT TR	FIN	PART NUMBER
DWN	APVD		
CHK	REL		
NAME	PGGD CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	DWG NO.
			C-100593
			SHEET 1 OF 1
			REV A

A

4

3

2

1

D

C