
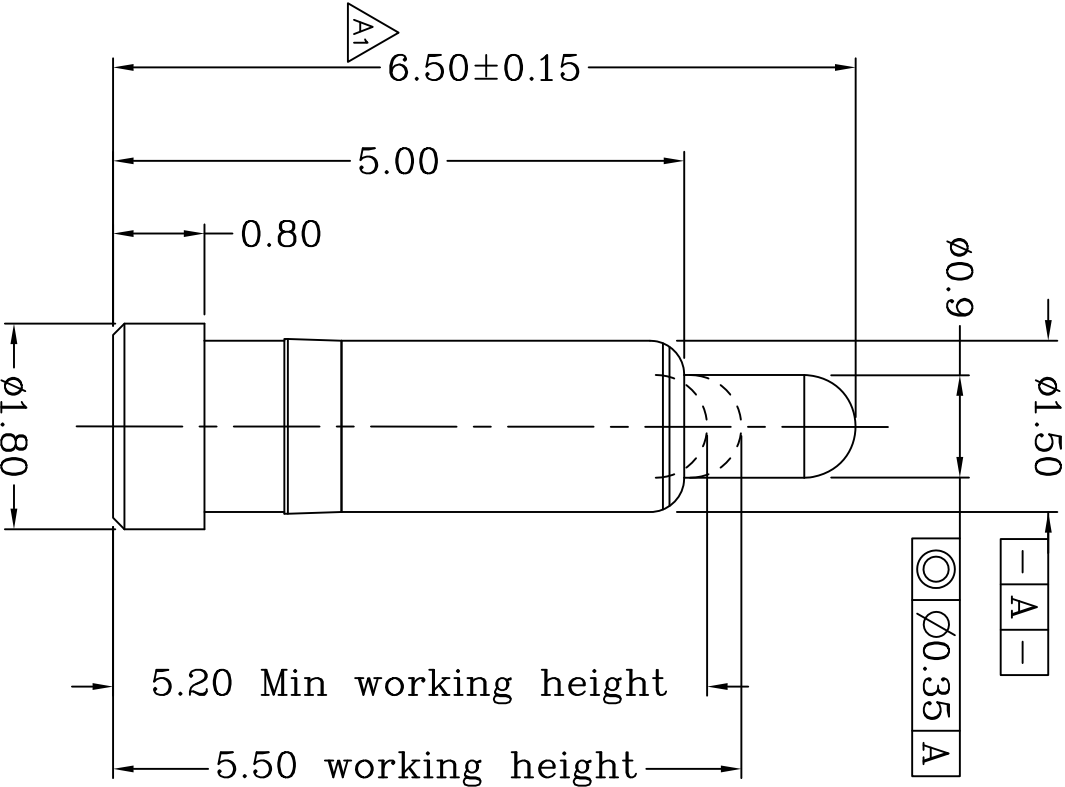




TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

working height	5.50mm	95gf min<2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.5um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:		Top-Link Electronics Top-Link Electronics Ltd.
0.0 = ±0.15		CHK:		REL:		
0.00 = ±0.10						
0.000 = ±0.005						
Angle: ±4°						
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.						
Name POGO PIN						
Scale	Size	DWG No.			Page	Rev.
1:1	A4	C-101083			1/1	A1