



DIST

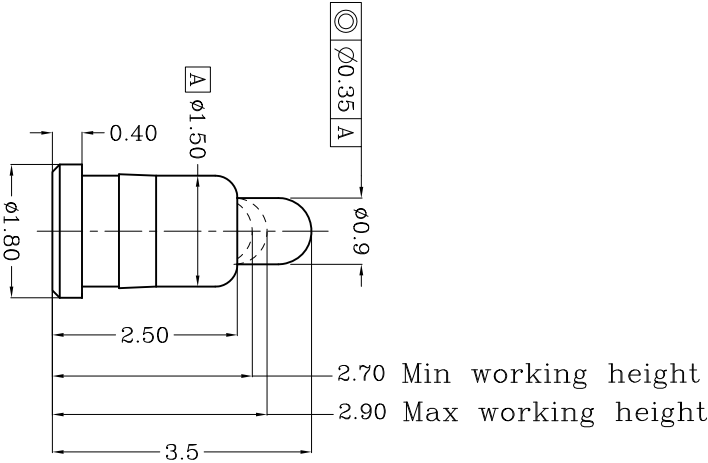


Table 1 Mechanical performance		
Max working height	2.90mm	80±25gf <2.1>
Min working height	2.70mm	105±30gf
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Warning: Working height are not permitted to be less than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 RoHS compliant.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.	Type	Customer drawing		Unit	mm		Weight		
	DWN:	Qin zuozhong		APVD:	<div>Top-Link Electronics</div> <div>Top-Link Electronics Ltd.</div>				
	CHK:			REL:					
	Name			POGO PIN					
	Scale		Size	DWG No.				Page	Rev.
	1:1	A4		C-101259				1/1	B