



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.  
C-101284

|      |
|------|
| LDC  |
| -    |
| DIST |
| -    |

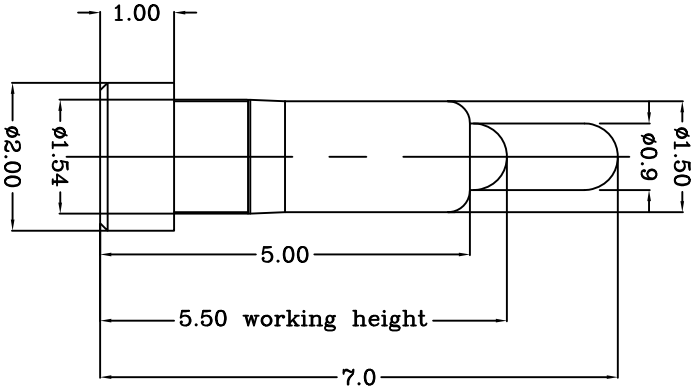

TOP-LINK

Force (gf)

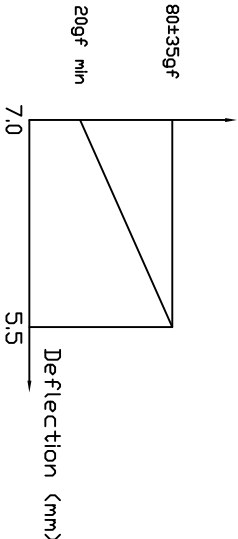

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)  
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1)Total stroke : 2.0mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101284-1  
PART NUMBER

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED

0 = ±  
0.0 = ±0.15  
0.00 = ±0.10  
0.000 = ±  
ANGLE: ±1°

32/

SURF TEXTURE:  
REMOVE BURRS, BREAK  
SHARP EDGES R0.05 MAX  
DO NOT SCALE PRINT

MATL



HT TR

-

FIN

-

DWN

Qin

CHK

Jin

REL

APVD

Lansing

Top-Link  
Electronics Ltd.

NAME

PGGD PIN

PG-2.0-1.0-1.5-5.0-7.0

SCALE

1:1

A4

DWG

NO.

C-101284

SHEET

1 OF 1

REV

A

4

3

2

1