


DWG NO.
C-101360

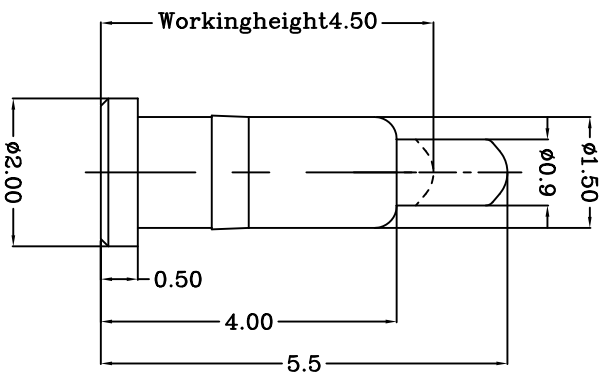

TOP-LINK

Notes:

① Material(材质):

- 1) Body : C36000
 - 2) Plunge : C36000 or C27000
 - 3) Spring : Stainless steel wire
- Plating(电镀):
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- Mechanical(机械性能):
- 1) Force: $30 \pm 15\text{gf}$ per pin at 1.0mm stroke (力: 下压1.0mm的力: $30 \pm 15\text{gf}$)
 - 2) Total stroke(总行程) : 1.40mm
 - 3) Durability(寿命): 10,000 cycle min.
- Electrical(电性能)
- 1) Contact resistance(接触阻抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

LDC	-
DIST	-

	Update		2010/09/06
	NEW		2009/09/22
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= ±	DWN		APVD		<i>Top-Link</i> Electronics	
0.0	= ±0.15	HE				Top-Link Electronics L.td.	
0.00	= ±0.10	CHK		REL			
0.000	= ±						
ANGLE: ±1°							
SURF. TEXTURE: 32/ 		NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		SCALE		A4	DWG NO.	C-101360	SHEET 1 OF 1
		1:1					REV B
		PGGD PIN PG-2.0-0.5-1.5-4.0-5.5					

101360-1
PART NUMBER

USED ON