


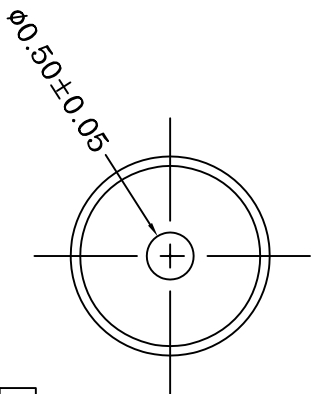

TOP-LINK

- 1)Body :Brass
- 2)Plunge :Brass
- 3)Spring :Stainless steel wire
- 2 Plating:
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical:
 - 1)Force:
 - Compress Pin to 5.4mm length
 - Release to 5.9mm length and measure force: 40gf Min
 - Release to 5.7mm length and measure force: 66±25gf
 - Release to 5.45mm length and measure force: 95gf Max
 - 2)Total stroke : 1.50mm
 - 3)Durability: 1000 cycle min.
- 4 Electrical
 - 1)Contact resistance: 50mOhm Max.
 - 2)Max electrical rating: 2ADC/6VDC

101406-1
PART NUMBER