


DIST

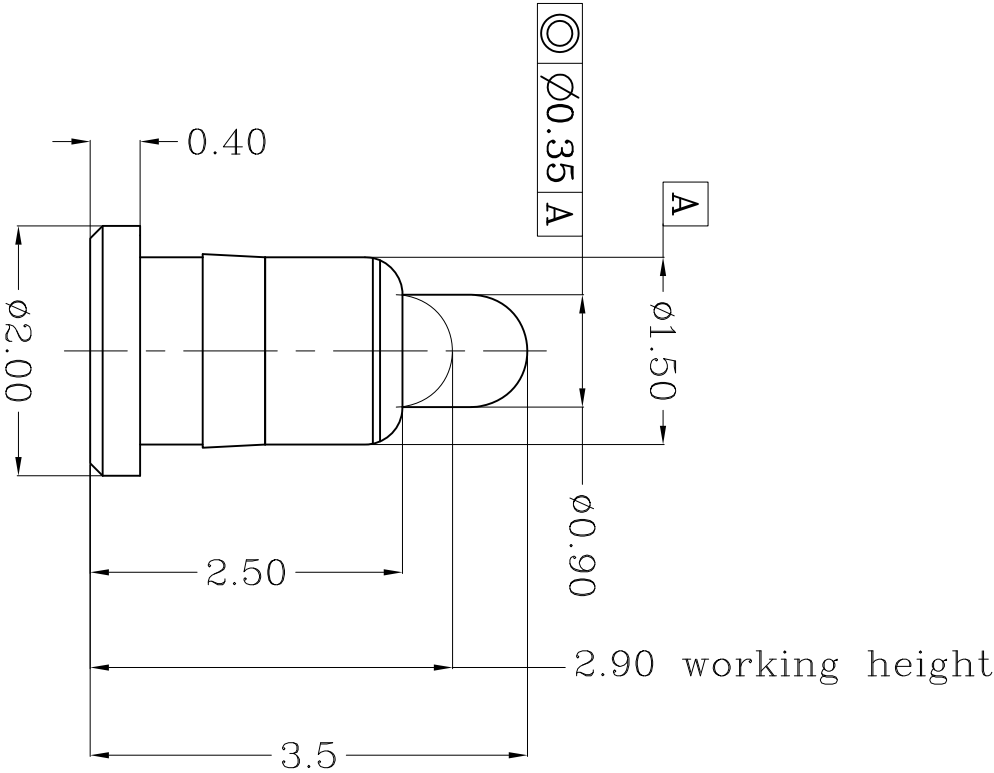

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:30mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

Working height	2.90mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight				
TOLERANCES UNLESS OTHER SPECIFIED		DWN:		APVD:		<i>top-Link</i> <u>Electronics</u> Top-Link Electronics Ltd.				
0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.005		CHK:		REL:						
Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.		Name Customer drawing								
Scale		1:1	Size	A4	DWG No.	C-101607	Page	1/1	Rev.	2