

proposal

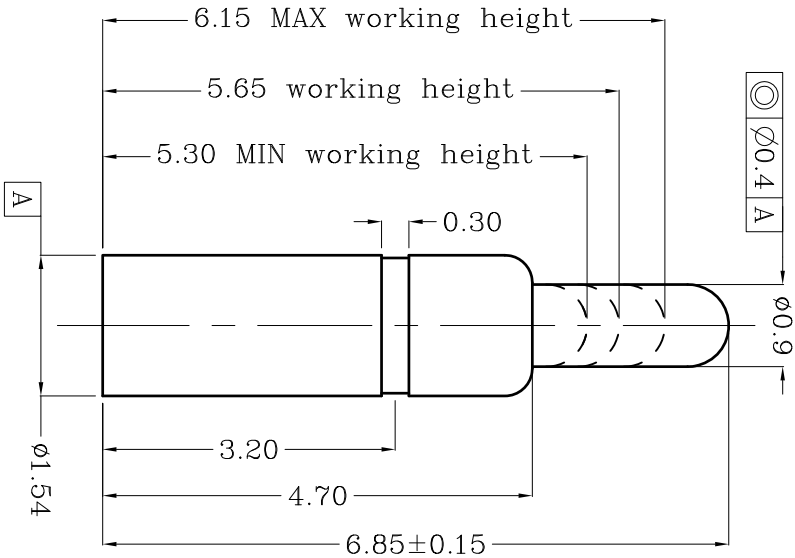


Table 1 Mechanical performance

Working height	5.65mm	100±20gf <2.1>
Durability	10,000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Warning: Working height are not permitted to be less than 1min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:			101724-1
0.0 = ±0.15		CHK:	REL:				
0.00 = ±0.10		Name					
0.000 = ±0.005		POGO PIN					
SURF. TEXTURE:		Scale	Size	DWG No.	Page	Rev.	
REMOVE BURRS.		1:1	A4	C-101724	1/1	2	
BREAK SHARP EDGES							
R0.05 MAX DO NOT SCALE PRINT.							