


proposal

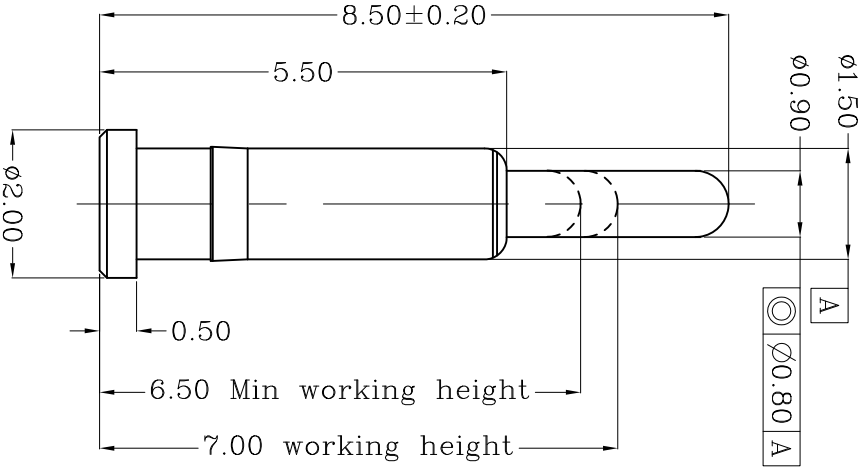

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	7.00mm	80gf min
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2> Warning: Working height are not permitted to be less than the working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

TOP LINK

	Update	2013/05/06
	NEW	2013/04/29
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101740-1	
0.0	±0.15	DWN:			Top-Link Electronics Ltd.	
0.00	±0.10	CHK:				
0.000	±0.05	REL:				
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name	POGO PIN			
Scale	Size	DWG No.		Page	Rev.	
1:1	A4	C-101740		1/1	2	