

proposal

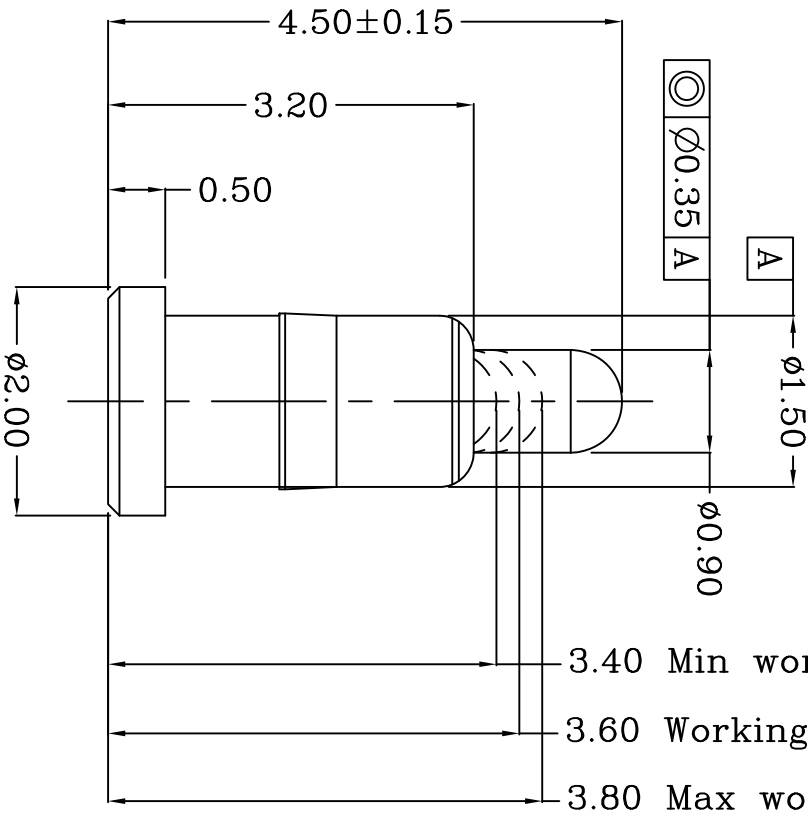


Table 1 Mechanical performance		
Working height	3.60mm	80gf Min<2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
  - 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
  - 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance  
Resistance: 30mOhm Max.  
Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP-LINK

Rev.	NEW	2014/01/21
Revision record.		
Date.		

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:	<div>Topo-Link <u>Electronics</u> Top-Link Electronics Ltd.</div>	
0.0 = ±0.15		CHK:		REL:		
0.00 = ±0.10						
Angle: ±						
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.						
Name POGO PIN						
Scale	Size	DWG No.	C-20101011122		Page	1/1
1:1	A4				Rev.	1

20101011122
PART NUMBER

Top-Link Electronics Ltd.