
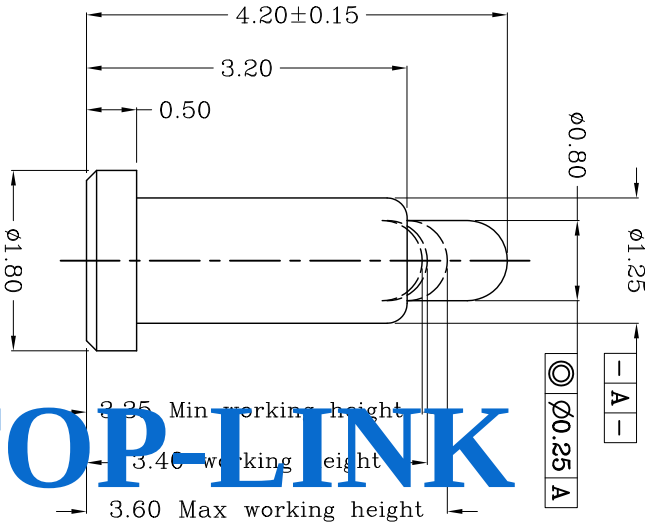
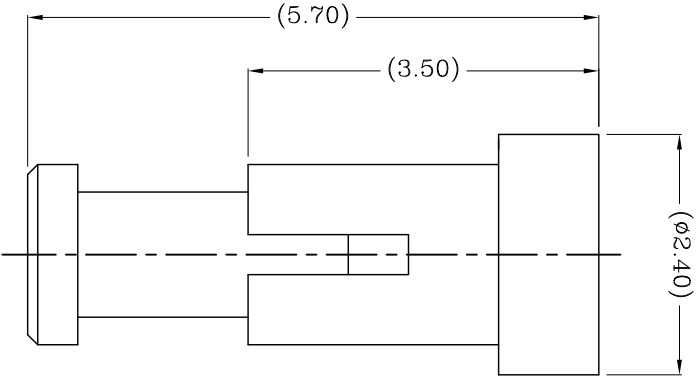



DWN No.:
C-10101011220

DIST

Recommended PCB Layout



TOP-LINK

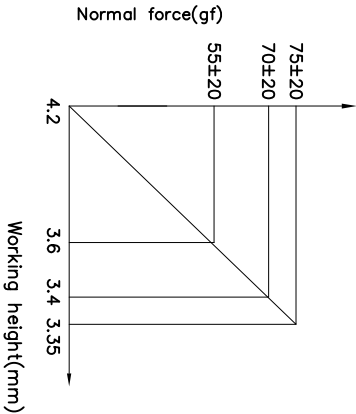

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 Packaging specification conforms to EIA 481
 - 5 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp,Plastic UL94 V-0 Color Black	_____
5				

Type	Customer drawing	Unit	Weight
Top-Link Electronics Ltd.		mm	
TOLERANCES UNLESS OTHER SPECIFIED			
0.0 = ±0.15	DWN:		
0.00 = ±0.10	Cai wanlu	APVD:	
0.000 = ±0.05	CHK:	REL:	
Angle: ±1°	Name	POGO PIN	
SURF. TEXTURE:			
REMOVE BURRS.			
BREAK SHARP EDGES			
R0.05 MAX. DO NOT SCALE PRINT.			
Scale	Size	DWG No.	Page
1:1	A4	C-10101011220	1/1
			Rev. 1

10101011220
PART NUMBER

Top-Link
Electronics
Top-Link
Electronics Ltd.