


DIST

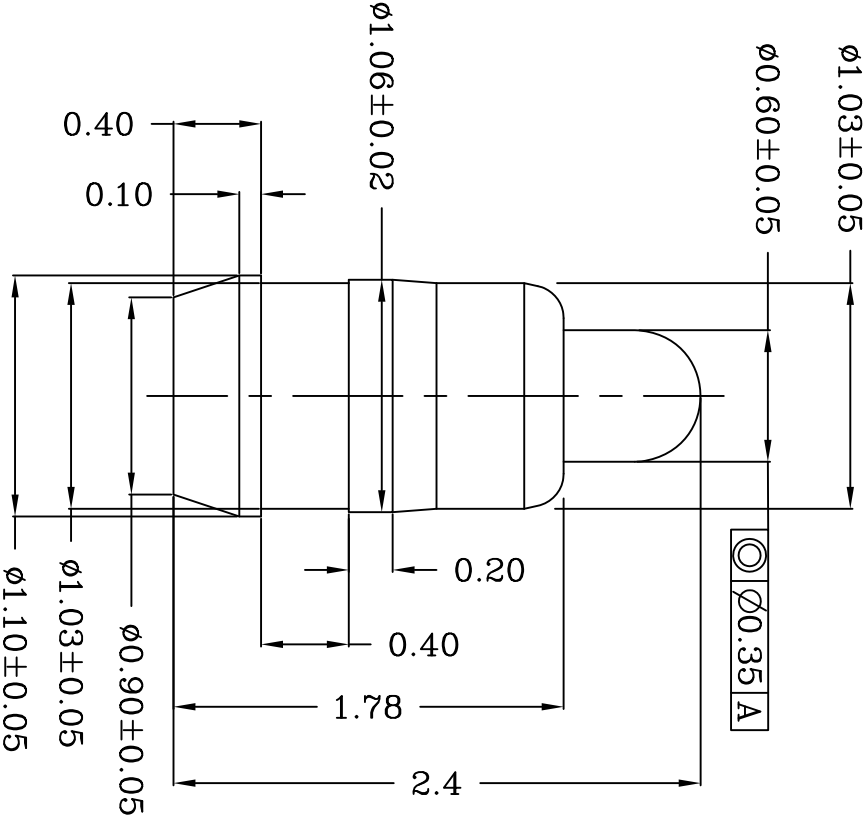

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance			
working height	1.90mm	70±20gf	<3.1>
Durability	10000cycle		

- Not
- 1 Dem'nsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <3.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 50mOhm Max.Current rating: 1.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 Rework complaint.

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin	APVD:		
0.0 = ±0.15	CHK:		REL:		
0.00 = ±0.10	Name	POGO PIN	PG-1.1-0.4-1.03-1.78-2.40		
0.000 = ±0.005	Scale	1:1	Size	A4	DWG No.
Angle: ±1°					C-101118
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.					Page 1/1
					Rev. A

101118-1
PART NUMBER

Top-Link Electronics
Electronics Ltd.