


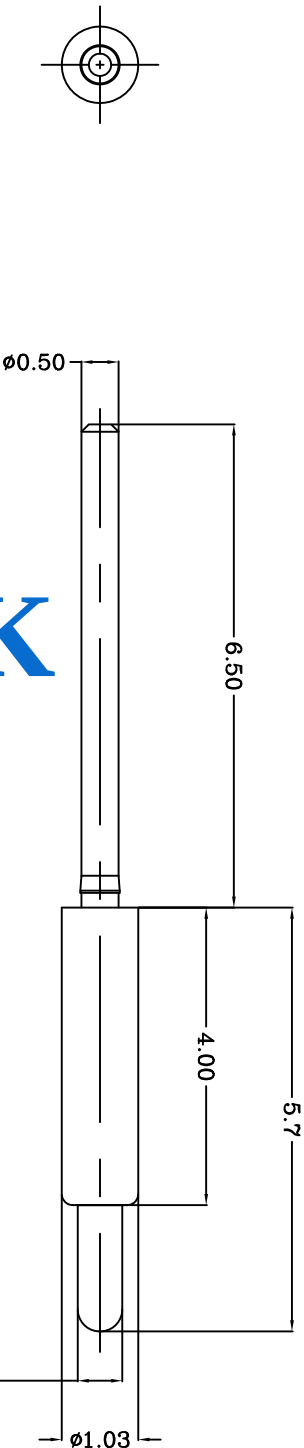

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).

- 2) Spring : Stainless steel wire
- 2 Plating
 - 1) Body: 0.1um Gold plating over 1.4um Nickle plating
 - 2) Plunger: 0.5um Gold plating over 1.4um Nickle plating
- 3 Mechanical
 - 1) Durability: 10,000 cycle min.
 - 2) Spring Force: 115±25gf at 1.0mm stroke.
- 4 Electrical
 - 1) Contact resistance: 30mOhm Max.
 - 2) Operating voltage: 36VDC Max.

LDC		NAME		P0GD PIN		SHEET		REV	
-				PG-0.5-6.5-1.03-4.0-5.7		1 OF 1		1	
DIST		SCALE		DWG		SHEET		REV	
-		1:1		C-101180		1 OF 1		1	

[illegible]