


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-100218

LDC
-
DIST
-


4

3

2



1

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Spring force: 12 $\pm$ 0.30N/-0.20N with 12mm stroke.
Full stroke: 1.4mm
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

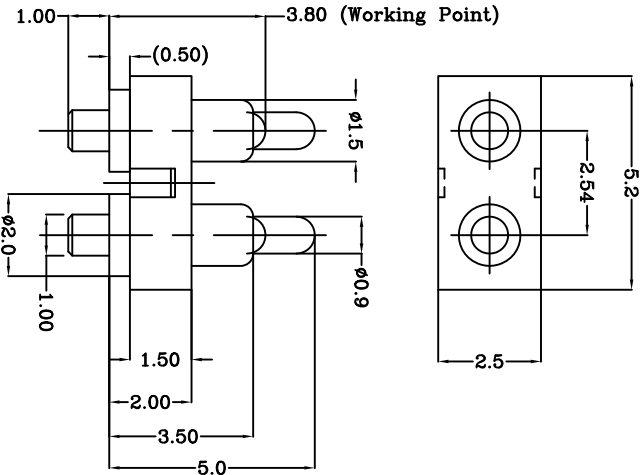

TOP-LINK

Recommended PCB Layout

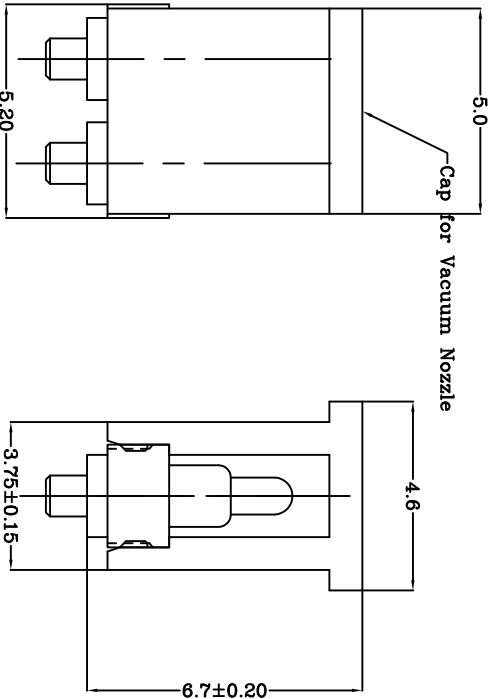

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN					
0 = ±				DWN		1		✓					
0.0 = ±0.15				Benny		APVD		Lansing					
0.00 = ±0.10				CHK		REL		Top-Link Electronics Ltd.					
0.000 = ±				Andy				Top-Link Electronics					
ANGLE: ±1°				NAME BATTERY POGO CONNECTOR 2 POSITIONS									
SURF TEXTURE: 32/				PGC-1.5-5.0-R-2P-2.54PH									
REMOVE BURRS, BREAK				SCALE		A4		DWG NO. C-100218		SHEET 1 OF 1		REV B	
SHARP EDGES R0.05 MAX				1:1									
DO NOT SCALE PRINT													