






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

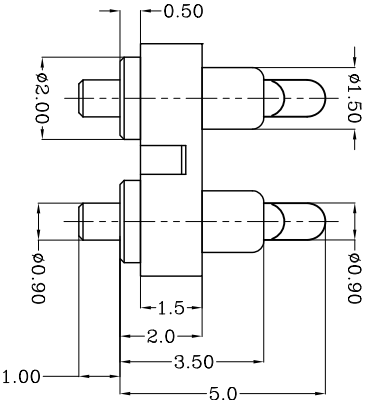



DWG NO. C-100417



TOP-LINK

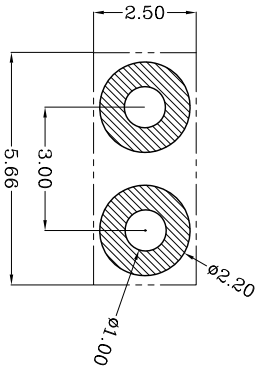

Recommended PCB Layout

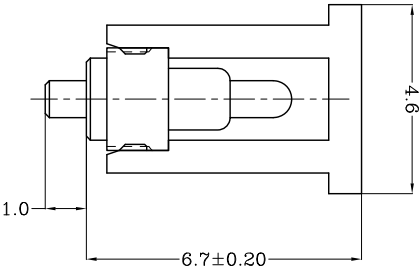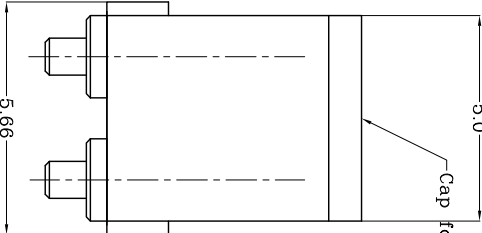

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Spring force: Min 0.2N with 0.5mm stroke
1.35 +/- 0.25N with 10mm stroke.
Full stroke: 12mm
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .

LDC
-
DIST
-

LTR	REVISION	APVD	DATE
-	new	-	08/10/27
-	RECORD	-	-

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN	PART NUMBER
DWN	APVD	REL	100417-2
CHK	lansing	REL	Top-Link
Jim	REL	REL	Electronics Ltd.
NAME	SCALE	DWG NO.	BATTERY POGO CONNECTOR
1:1	A4	C-100417	2 POSITIONS PGC-1.5-5.0-R-2P-3.0PH
SHEET	REV	REV	A
1 OF 1	A	A	A

USED ON

-