




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101334

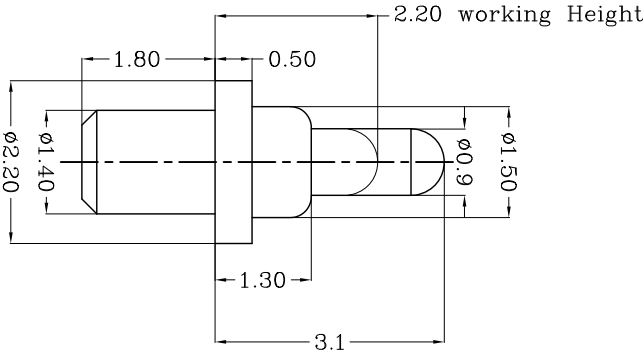

TOP-LINK

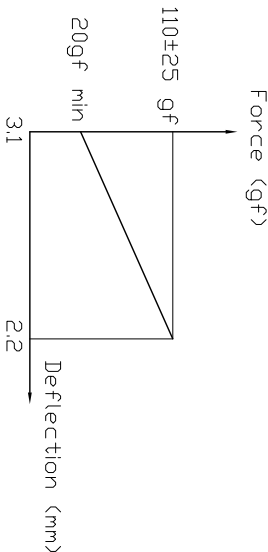

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2)Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.1mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN
-

101334-1

PART NUMBER

MATL	HT TR	FIN
1	-	-

DWN	APVD	REL
Qin	Lansing	REL
CHK		
Jim		

NAME	SCALE	DWG NO.	C-101334
POGDO PIN Customer Drawing	1:1		

SCALE	A4	DWG NO.	C-101334
1:1			

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ± -
0.0	= ±0.15
0.00	= ± 0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

DATE	APVD	REVISION RECORD	L TR
2009/02/19			

LDC	DIST
-	-

4

3

2

1